



ZA-X – fertilizer spreaders for specialized crops




The spread rate adjustment with its two individual setting shutter slides is located well out of the “dirt range” meaning that they are neither splashed from the tractor wheels or with fertilizer dust from the spreading discs. In this way the machine remains clean and easy to operate. The pointers are arranged on a large, clear scale so that different rate settings such as border spreading are immediately obvious.



The twin disc spreader is for smaller to medium sized arable farms and grassland farms. The ZA-X Perfect allows convenient adjustment and the accurate spreading of all commercial types of fertilizer up to 60 ft (18 m) and with Urea up to 50 ft (15 m).



A twin hopper; that means automatic monitoring. If one side empties quicker than the other it can immediately be checked whether something is blocking the opening or whether the levers are evenly positioned on the stops. The twin hopper design gives optimized steep hopper walls, which guarantee – unlike single tip hoppers – a very constant fertilizer flow, even on slopes or with very little fertilizer left.

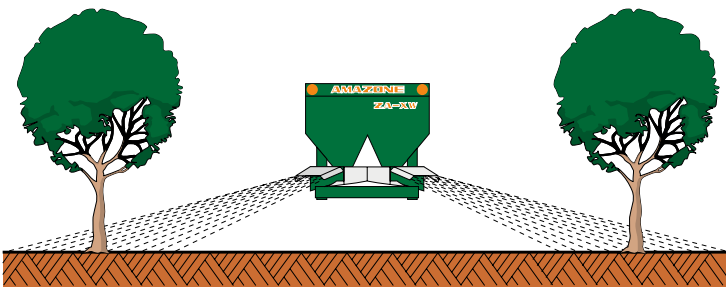

For operation in specialized crops. For example, in vineyards, orchards, hop gardens and agriculture

The narrow hopper shape with very steep hopper walls and a low filling height, capacities from 17.65 up to 24.72 cubic feet (500 - 700 litres) and working widths from 33 ft up to 60 ft (10 m - 18 m) or 6.5 up to 20 ft (2 m - 6 m) with the adjustable row spreading device are the particular features of this special spreader.



For fruit and hop gardens, the fertilizer is distributed around the plants by the easily adjustable twin-row spreading device, which leads to considerable savings in fertilizer application between the rows. Row spacing is from 6.5 ft to 20 ft (2 - 6 m).



The narrow total width of the spreader of only 3.28 ft (1 m) preventing tendril damage in vineyards. When equipped with the adjustable row-spreading device it is the ideal fertilizer spreader for orchards and hop culture.



When filling, the swivel hopper cover (**special option**) is simply folded open and ensures dry material even when spreading in wet weather. A traffic light kit with warning plates (**special option**) is available upon request.



The proven parking wheels (**special option**) ease the process of attaching the spreader to the tractor and detaching and maneuvering in the yard. The wheels are quickly removed.





ZA-X – fertilizer spreaders for specialized crops

Technical data

Model	ZA-XW Perfect 502	ZA-X Perfect 602	ZA-X Perfect 902	ZA-X Perfect 1402	ZA-XW Perfect 502 and S 200	ZA-X Perfect 602 and S 350	ZA-X Perfect 902 and S 350	ZA-X Perfect 902 and L 800	ZA-X Perfect 1402 and S 350
Hopper capacity	17.65 cu ft / 500 L	21.19 cu ft / 600 L	31.78 cu ft / 900 L	49.44 cu ft / 1400 L	24.72 cu ft / 700 L	30 cu ft / 850 L	44.14 cu ft / 1250 L	60 cu ft / 1700 L	61.8 cu ft / 1750 L
Payload	2205 lbs / 1000 kg	3968 lbs / 1800 kg	3968 lbs / 1800 kg	3968 lbs / 1800 kg	2205 lbs / 1000 kg	3968 lbs / 1800 kg	3968 lbs / 1800 kg	3968 lbs / 1800 kg	3968 lbs / 1800 kg
Weight	428 lbs / 194 kg	467 lbs / 212 kg	547 lbs / 248 kg	606 lbs / 275 kg	467 lbs / 212 kg	514 lbs / 233 kg	602 lbs / 273 kg	661 lbs / 300 kg	661 lbs / 300 kg
Filling height	3.05 ft / .93 m	2.99 ft / .91 m	3.18 ft / .97 m	3.81 ft / 1.16 m	3.51 ft / 1.07 m	3.44 ft / 1.05 m	3.64 ft / 1.11 m	4.10 ft / 1.25 m	4.27 ft / 1.30 m
Filling width	2.95 ft / .90 m	4.59 ft / 1.40 m	6.20 ft / 1.89 m	6.20 ft / 1.89 m	2.85 ft / .87 m	4.49 ft / 1.37 m	6.17 ft / 1.88 m	8.14 ft / 2.48 m	6.17 ft / 1.88 m
Length	4.66 ft / 1.42 m	4.66 ft / 1.42 m	4.43 ft / 1.35 m	4.43 ft / 1.35 m	4.66 ft / 1.42 m	4.66 ft / 1.42 m	4.49 ft / 1.37 m	4.43 ft / 1.35 m	4.49 ft / 1.37 m
Width	3.51 ft / 1.07 m	4.92 ft / 1.50 m	6.6 ft / 2.02 m	6.6 ft / 2.02 m	3.51 ft / 1.07 m	5.09 ft / 1.55 m	6.79 ft / 2.07 m	8.69 ft / 2.65 m	6.79 ft / 2.07 m
Working width	32.8 to 59.06 ft / 10 to 18 m	32.8 to 59.06 ft / 10 to 18 m	32.8 to 59.06 ft / 10 to 18 m	32.8 to 59.06 ft / 10 to 18 m	32.8 to 59.06 ft / 10 to 18 m	32.8 to 59.06 ft / 10 to 18 m	32.8 to 59.06 ft / 10 to 18 m	32.8 to 59.06 ft / 10 to 18 m	32.8 to 59.06 ft / 10 to 18 m
Working Width (urea)	Up to 50 ft / Up to 15 m	Up to 50 ft / Up to 15 m	Up to 50 ft / Up to 15 m	Up to 50 ft / Up to 15 m	Up to 50 ft / Up to 15 m	Up to 50 ft / Up to 15 m	Up to 50 ft / Up to 15 m	Up to 50 ft / Up to 15 m	Up to 50 ft / Up to 15 m

Illustrations, descriptions and technical data are not binding and subject to change!
Machine illustrations can vary due to country-specific traffic legislation.

Patents and patents pending.

Four robust models



With the added flexibility of the 12.36 cu ft (350 L) extension it is possible, to increase, for example, the ZA-X Perfect 902 and 1402 to 44.14 and 61.8 cu ft (1250 and 1750 L) respectively. The extension can be retrofitted at any time.

