



# AMAZONE

## Übersicht Pflugkörper Teres und Tyrok Overview plough bodies Teres and Tyrok




Pflugkörper / Plough bodies	U 40	STU 40	STW 35	W 35	WXL 35	S 35
Min. Arbeitstiefe ca. (cm) Minimum working depth approx. (cm)	18	18	18	15	15	15
Max. Arbeitstiefe ca. (cm) Maximum working depth approx. (cm)	35	35	30	30	28	30
Max. Arbeitsbreite ca. (cm) Maximum furrow width approx. (cm)	55	55	50	50	55	50
Eignung / Suitability	- ○ + ++	- ○ + ++	- ○ + ++	- ○ + ++	- ○ + ++	- ○ + ++
Leichter, klebender Boden (Moor) / Light, sticky soils (peat)						
Leichter Boden (Sand) / Light soils (sand)						
Mittlerer Boden / Medium soils						
Schwerer Boden / Heavy soils						
Sehr schwerer Boden (Ton) / Very heavy soils (clay)						
Hanglagen / Sloping terrain	●	●	●	●	●	●
Krümelung / Crumbling		●	●	●	●	●
Furchenräumung / Furrow clearance	●	●	●	●	●	●
Zugkraftbedarf / Pulling power requirement	●	●	●	●	●	●
Bodenwendung / Soil inversion	●	●	●	●	●	●

Eignung / Suitability: ●● sehr gut geeignet / very well suited ● gut geeignet / well suited ○ geeignet / suited □ weniger gut geeignet / poorly suited

### SpeedBlade-Körper mit patentiertem AMAZONE Streichblech-Vorderteil SpeedBlade body with patented AMAZONE mouldboard front shin

- AMAZONE Streichblech-Vorderteil  
AMAZONE mouldboard front shin
- - - Wettbewerber 1 / Competitor 1
- - - Wettbewerber 2 / Competitor 2
- Verschleißzonen bei ca. 5, 8 oder 10 km/h  
Wear zones at approx. 5, 8 or 10 km/h

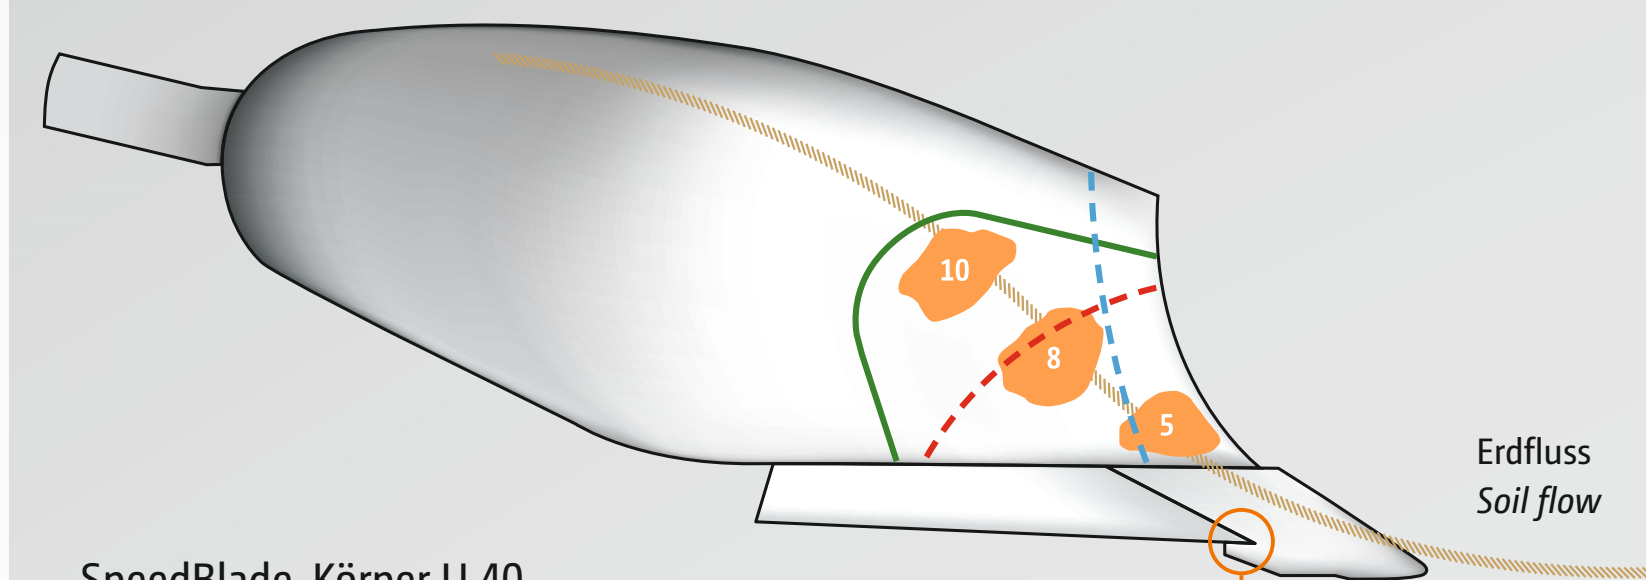

SpeedBlade-Körper U 40  
SpeedBlade body U 40

#### Scharspitze überdeckt das Scharblatt The point covers the wing:

- Die Fügestelle liegt somit geschützt in der Scharspitze  
The joint is therefore protected by the point
- Pflanzenreste, Ballenschnüre, Drähte oder Wurzelreste können sich nicht aufhängen  
Plant residues, baler twine, wire and root residues cannot get entangled