



**AMAZONE**

Mounted sprayer ***UF 01***





# UF 01 mounted sprayer

The small sprayer with a big reputation



- On request, all new AMAZONE sprayers can be provided with a country-specific sprayer proficiency certificate. The proficiency certificate meets current EU regulations according to EN ISO 16122, which is, for European member states, supported also with the CEMA label.



The compact UF 01 mounted sprayer, with a tank capacity of 900 l or 1,200 l, is characterised by its robust construction and lightweight design. With a choice of the Q-Plus, Super-S1 or Super-S2 booms in widths from 12 to 24 m, the UF 01 caters for a wide ranging size of farm.

The AMAZONE UF 02 mounted sprayer is available in wider boom widths and bigger tank capacities. Further information on this model can be found in the UF 02 brochure.



## UF 01

### Slick – Sleek – Sly

	Page
The advantages at a glance	4
The models	6
The technology   Spray agent tank	8
The technology   Hopper	10
The technology   Operator station	12
Operation   Induction, agitation, cleaning	14
Control   AmaSpray <sup>+</sup>   ProfiClick	16
ISOBUS	18
Boom	26
Pressure recirculation system	34
Nozzles	36
Optional equipment	38
Front tank	40
AMAZONE service	42
Technical data	44

! “And even in work, the level of specification available is the major bonus. From manual operation right through to ISOBUS control with Section Control – anything is possible.”


(dlz agrar magazine – Field test UF 1201  
“Super also in small widths” · 05/2016)



**INTERACTIVE DRIVER TRAINING**  
[www.amazone.net/smartlearning](http://www.amazone.net/smartlearning)



# UF 01 mounted sprayer



12 m – 24 m



900 l to 1,200 l  
up to 2,200 l with FT



up to 11 part-width  
sections



160, 210 or 250 l/min  
pump capacity



# The advantages at a glance:

- + Robust construction in a lightweight design
- + Light and smooth polyethylene spray agent tank with favourable centre of gravity
- + Sprayer boom in a super-light, super-strong and super-compact profile design
- + Outstanding boom suspension means a smooth boom ride
- + Maintenance-friendly, self-priming piston diaphragm pump which can run dry
- + Induction bowl with venturi for quick, safe and accurate operation
- + Extendable to 2,200 litres with the FT 1001 front tank – for even higher outputs

## MORE INFORMATION

[www.amazone.net/uf](http://www.amazone.net/uf)



**DOWNLOADS**  
mySprayer App



**SMARTLEARNING**  
[www.amazone.net/smartlearning](http://www.amazone.net/smartlearning)



# The choice is yours

The UF 901 or UF 1201 mounted sprayers



AMAZONE field sprayers fulfil the demands of the crop protection regulations, the guide lines of the Julius Kühn Institute and the highest European test standards (ENTAM certification, D - 1732).

On request, AMAZONE sprayers are provided with an official certificate of inspection for crop protection sprayers.



! “Those people who like to look into the tank from above can do this without any danger thanks to the standard ladder with platform and handles.”

(dlz agrar magazine – Field test UF 1201  
“Super also in small widths” · 05/2016)

UF 901  
1,050 litres





UF 1201  
1,350 litres

- ! “Those using the machines rated the build quality and the paint finish of the machines as very good. The highest rating was also given for service life, the ease of mounting and dismounting from the tractor as well as the manoeuvrability and compactness. Furthermore, the boom position and the unproblematic suspension were also praised.”

(Quotation: BBA recognition 2006)



- ! “The UF 1201 with the Super-S1 boom is an uncomplicated sprayer designed in particular for medium-sized farms and which is easy to operate thanks to ProfiClick and the AmaSpray+ in-cab terminal.”

(“dlz agrar magazine” – Field test of UF 1201

“Super also in small widths” · 05/2016)



# So easy: mount up, fill up and go!



- ✔ Functional spray agent tank
  - Slim tank with a favourable centre of gravity
  - Smooth tank walls for easier cleaning inside and outside
  - Minimised residual volumes even on slopes due to the optimised design
  - Effective agitation capacity and JKI-certified



## Just a few things to connect. Quickly and safely.

With a few things to hitch up, you can quickly and safely attach the UF 01 to the tractor. Sufficient space between the tractor and the sprayer makes attaching easy.

The parking wheels make it easy to move the sprayer. All the cables and hoses are clearly and unmistakably arranged.

The fresh water tank with a capacity of 120 l is located on the right-hand side under the spray agent tank. The convenient positioning on the right allows easy filling at ground level. If required, the fresh water tank can also be filled via the fill port on the left.



UF 1201  
with Super-S2 boom in 24 m working width

Clean water tank

Induction bowl



# Everything functions when in orange and green

Fast and safe filling



## ✓ Filling via the suction hose

The sprayer can be filled using the suction hose via the 2" suction port. The liquid flow is routed in such a way that during the filling procedure there is always clean water available at the induction bowl.

## ❗ "In terms of filling speed, the sprayer from Amazone is right out in front."

(profi magazine – Practical test: "5 mounted sprayers in comparison" - 12/2012)





### Option: bowser fill port

A bowser fill port with either a Geka or Camlock coupling is available as an option for filling via a pressurised connection. This connection can be used to fill the fresh water tank simultaneously from the left-hand side.



### Piston diaphragm pumps

The piston diaphragm pumps run perfectly happily when dry and are liquid fertiliser safe. The design of the pumps simultaneously ensures a constant, high delivery capacity with a high filling speed and quiet operation even under high pressure.

Pumps with a delivery capacity of 160 l/min, 210 l/min and 250 l/min are available. The oil reservoir for the pump is positioned within the field of vision of the driver for easy monitoring of the pump from the tractor cab.

### Fill level indicator

The fill level indicator can be read both via the pointer and electronically via the operator terminal.



- ✔ A pressure connection for quick emptying is possible via an optional 2" outlet.



# UF 01 operator station

Clear and simple via the SmartCenter

**All functions are controlled with only three levers:**

- 1) **Vario pressure - valve** for filling, inducting, spraying, internal or external cleaning
- 2) **Quick emptying** (option) for emptying the spray agent tank with the aid of the pump
- 3) **Agitator valve** for the infinitely variable setting of the agitation intensity via the self-cleaning pressure filter.  
Integrated additional function: Specific draining of the pressure filter
- 4) **Vario suction - valve** for drawing from the spray agent tank, from the fresh water tank or via the suction hose.  
Integrated additional function: Pressure-free residue draining and venting of the suction filter.



- ✓ **SmartCenter** – clearly arranged and user-friendly.  
All the controls are logically and unmistakably arranged directly to the front left-hand side of the sprayer.  
The valves are all marked with self-explanatory symbols to avoid operational errors. Compare!

- ⓘ "All the valves and taps are located on the left hand side which means less walking."


(dlz agrar magazine – Field test UF 1201  
"Super also in small widths" · 05/2016)



# UF 01 liquid circuit

- ✓ AmaTron 4 – execution with DUS, quick emptying and external wash down kit

- Suction side
- Pressure side
- External cleaning
- Internal cleaning
- Return flow
- Filling venturi

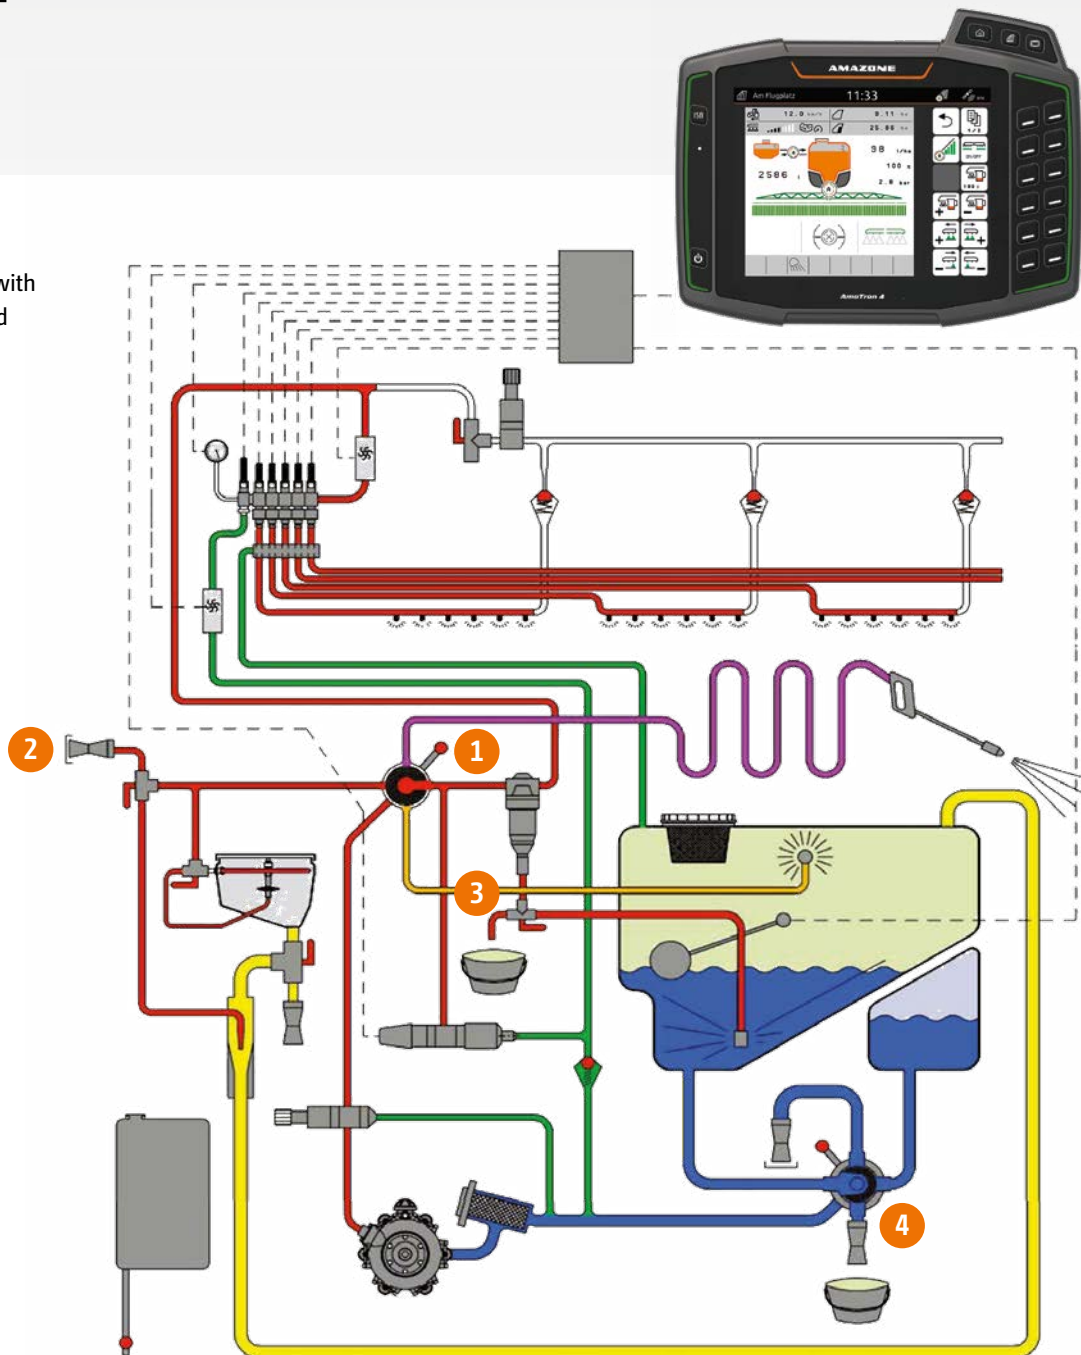

- ✓ UF 01 liquid circuit – logical and convenient

The liquid circuit of the UF series has been optimised for operator friendliness and lowest residual sprayer volumes. Cleaning can be carried out with a partially filled tank, and the suction and pressure filters can be emptied before opening the filter housing.

# Exact mixing of the spray agents

Quick and safe with the induction bowl

The 55 litre induction bowl offers fast and clean working and is very easily accessible at the front left of the operator station.



A high fill rate is obtained with the venturi.



## Induction

Powdery agents and high rates of granular fertiliser are quickly and safely dissolved via the rinse ring and simultaneously inducted at high capacity. Three additional jets provide the spill-free and effective induction. Stepless adjustment of the delivery and induction rates.

- ❗ "The three additional mixing nozzles provide a high agitation effect and allow the induction of agents difficult to dissolve. Practical thinking: when closed, the canister flushing also cleans the lid and the induction bowl."

(dlz agrar magazine – Field test UF 1201  
"Super also in small widths" · 05/2016)

## ✓ Pressure filter

The self-cleaning pressure filter is standard equipment. The agitator tap also enables the specific draining of the pressure filter. This allows the filter to be checked without any leakage of spray agent – especially when the tank is full.

## Canister cleaning

For unproblematic cleaning of the spray agent canisters and for full utilisation of the contents, the canisters are flushed using the rotary nozzle. With this nozzle, the induction bowl can be cleaned even when the lid is closed. A dead man's control keeps the user safe.





## Stepless hydraulic main agitator

The intensity of the hydraulic agitator can be steplessly reduced down to nothing in order to avoid any foaming of the crop protection agent or to facilitate spraying out the remaining tank contents.

On AMAZONE crop protection sprayers, the unsprayed plant protection agent is delivered back via the return flow into the suction system. In this way any unintended agitation of the spray agent via the return flow is prevented.



## Internal and external cleaning

The standard internal tank cleaning system with rotary nozzle ensures quick and effective washing out. Smooth tank walls without apertures and indentations ensures reliable function and simple checking.

The optionally available spray lance allows the thorough external cleaning of the sprayer immediately after operation whilst still in the field. The external wash kit delivers a working pressure of 10 bar and has a 20 m hose. This enables effective cleaning in the field with low water consumption.



# High-tech valve chests



## ✓ Manually-actuated HB valve chest

The manually operated valve chest allows spraying without any electrical power supply. The main control valve, the manual pressure adjustment and the control for five part-width sections have a clever ergonomic arrangement. Due to the equal pressure system, the spray rate per hectare remains constant when switching on and off the part-width sections.



## ✓ Electrically remote-controlled TG valve chest

Cutting-edge valve chest technology available for ISOBUS control and AmaSpray<sup>+</sup>. The part-width boom sections are quickly switched on and off without drips via electric motor valves with pressure relief. The amount applied is accurately and directly controlled by the operator terminal for all situations. An equal pressure compensation system is not required with this system.



# AmaSpray<sup>+</sup> operator terminal



## AmaSpray<sup>+</sup> – simple and versatile

AmaSpray<sup>+</sup> enables simple yet fully automatic control of the UF 01. The buttons integrated in the operator terminal enable the switching of 5, 7 or 9 part-width sections. The AmaSpray<sup>+</sup> has a digital pressure display and a digital tank level indicator. It records the quantity applied and area worked. The hydraulic functions are operated using the spool valves on the tractor. Boom tilt and pendulum lock are also displayed in the AmaSpray<sup>+</sup>. As an option, AmaSpray<sup>+</sup> enables one-sided folding of the boom or control of the end nozzle spraying systems.

The AmaSpray<sup>+</sup> operator terminal with serial interface can also be used for automatic documentation (ASD) and part area site-specific application via a GPS terminal.

- ❶ “The sprayer can be comfortably operated with the AmaSpray<sup>+</sup> in-cab terminal in combination with ProfiClick.”

(dlz agrar magazine – Field test UF 1201  
“Super also in small widths” · 05/2016)

### The benefits:

- ✔ Single, high-contrast, backlit screen
- ✔ Master on/off and part-width section control
- ✔ Up to 9 part-width sections
- ✔ Digital pressure indication
- ✔ Digital fill-level indicator
- ✔ Display of the boom position and lock status
- ✔ Hectare meter (total and daily counter)
- ✔ +/- 10 % key
- ✔ Field record management system

### Additional functions (with optional equipment):

- ✔ Pre-select fold for independent boom folding
- ✔ End nozzle or boundary nozzle switching for Super-S boom (as an alternative to pre-select fold)
- ✔ Fold or tilt via 1 double-acting spool valve (electro-hydraulic changeover valve)
- ✔ ASD inside: serial interface for documentation and GPS terminal versatility

# ProfiClick

## The small switchbox with a huge comfort factor

The new ProfiClick control box provides simple and precise operation of the hydraulic functions of the boom on AMAZONE crop protection sprayers.

It is available in combination with the electro-hydraulic "Profi-fold I" pack. All the operational functions of the ProfiClick control box are ergonomically arranged and linked directly with that function. The potentiometer for the re-adjustment of boom tilt can be controlled on the move without looking thanks to the centre position via a detent function. So the driver can concentrate perfectly on driving.



- ✔ ProfiClick control box  
– Actuation of the boom functions via the oil circuit

- |                          |                |
|--------------------------|----------------|
| ① Ergonomic hand support | ④ Boom fold    |
| ② On/off                 | ⑤ Boom up/down |
| ③ Boom pendulum lock     | ⑥ Boom tilt    |

MEMBER OF



# ISOBUS as the basis for intelligent communication

## One language, many benefits!

Each ISOBUS-enabled machine from AMAZONE comes with the latest technology and almost unlimited possibilities. It makes no difference whether you use an operator terminal from AMAZONE or an ISOBUS terminal fitted directly in the tractor. ISOBUS is an internationally recognised standard for communication between the operator terminal, tractors and connected implements on the one hand and Farm Management Information Systems on the other.

## Operation via a wide-range of ISOBUS terminals

Which means that ISOBUS enables you to take control of all your ISOBUS compatible equipment. You only have to connect the machine to the respective ISOBUS terminal and the usual operator interface appears on the monitor in your tractor cab.

### Benefits of ISOBUS at a glance:

- ✔ This worldwide standard provides a uniform interface and data exchange format that ensures compatibility even with third party manufacturers
- ✔ Plug and Play between machine, tractor and additional ISOBUS implements





**MORE**  
than ISOBUS

# Perfectly developed machine operation from AMAZONE

**AMAZONE machinery and operator terminals offer a range of functions which are very easy and safe to operate:**

- ✓ Highest compatibility and function flexibility of your ISOBUS equipment
- ✓ No additional modules on the machine side. All ISOBUS machines from AMAZONE come ready-equipped with the necessary ISOBUS functions as standard
- ✓ Practice-oriented machine software and logical menu structure
- ✓ MiniView display with all AMAZONE terminals and additional ISOBUS terminals. See, for instance, the machine data in the map view.
- ✓ Possibility of operating the machine via the tractor terminal or a twin terminal solution
- ✓ Flexible assignment of the map and machine view between the tractor terminal and the operator terminal
- ✓ Unique operating concept. Freely configurable displays and individual user interfaces for each driver
- ✓ Useful additional functions such as automatic boom lowering on AMAZONE crop protection sprayers
- ✓ Integrated TaskController data logger function



Clearly-structured AMAZONE machine operation

## Advantages of the AMAZONE machine software:

- ✓ User-oriented and intuitive
- ✓ Tailored to the machine
- ✓ Function scope above and beyond the ISOBUS standard

# AmaTron 4 ISOBUS terminal

Full functionality



The AmaTron 4 ISOBUS operator terminal, developed in-house by AMAZONE, enables convenient tablet-style, touch-screen control of any ISOBUS-enabled agricultural machine. AmaTron 4 makes all ISOBUS functionality possible - with added convenience, user-friendliness and overviews. And yet: it performs even better in combination with AMAZONE agricultural machinery and guarantees full functionality when it comes to precision farming.



## STURDY!

- ✓ Low-reflection, 8" display with waterproof and dustproof aluminium housing
- ✓ Rear-mounted hand rest for a secure grip



## WELL THOUGHT THROUGH!

- ✓ Practical and clear menu navigation for simple and intuitive use
- ✓ Actuation via touch screen or soft keys
- ✓ Simple documentation and job management: work first - then save the data
- ✓ Optional software licences for maximising every opportunity in precision agriculture



## COMFORT!

- ✓ App carousel for quick and easy navigation at the swipe of a finger
- ✓ Freely configurable status bar - the most important parameters available at a glance, all of the time
- ✓ The practical quick-start menu allows quick and easy import and export of job data

Extended functionality via licences	Functions in AmaTron 4 for the UF 01
GPS-Maps&Doc	<ul style="list-style-type: none"> <li>• Inactive field boundaries and automatic field detection</li> <li>• Documentation via ISOBUS Task Controller or PDF export</li> <li>• Application maps in ISO-XML format and Shape file format</li> <li>• Online data exchange via the AmaTron Share App</li> </ul>
GPS-Switch basic	<ul style="list-style-type: none"> <li>• Section Control with up to 16 part-width sections</li> <li>• Virtual headland</li> <li>• Automatic boom lowering</li> </ul>
GPS-Switch pro	<ul style="list-style-type: none"> <li>• Auto-zoom, obstacle marking</li> </ul>
GPS-Track	<ul style="list-style-type: none"> <li>• Optical parallel guidance aid</li> <li>• Various different track modes</li> </ul>
AmaCam	<ul style="list-style-type: none"> <li>• Display of a camera image on the AmaTron 4 including reverse detection</li> </ul>
AmaTron Twin	<ul style="list-style-type: none"> <li>• Display extension using the AmaTron Twin App</li> </ul>



# More comfortable machine operation

## AmaTron Twin App – extended display for user-friendly operation

The AmaTron Twin App offers the driver even more comfort during work, as GPS functions in the map view can also be displayed on a tablet in parallel with the machine operation on the AmaTron 4.

### Advantages of the AmaTron Twin display enhancement:

- ✔ Use of an existing mobile device
- ✔ Greater clarity – every application always in view
- ✔ Comfortable control of the GPS functions in the map view, in parallel, via the mobile device
- ✔ Clear, authentic representation of the working machine and its part-width sections



The AmaTron Twin App



Alternative map views with AmaTron Twin – easily visible display of the machine and its part-width sections, as well as buttons on the right hand side of the mobile device.

## AmaPilot<sup>+</sup> – everything to hand!

Thanks to the AUX-N feature, you can operate multiple functions on the machine via the AmaPilot<sup>+</sup> or any other ISOBUS multi-function joystick.



### Advantages of AmaPilot<sup>+</sup>:

- ✔ Nearly every function is controlled directly via the 3 levels
- ✔ Adjustable palm rest
- ✔ Freely programmable, individual key layout

# Workday made easy –

Make the most of the possibilities!

## ***GPS-Maps&Doc*** with data exchange via the AmaTron Share App



With the GPS-Maps&Doc licence, the AmaTron 4 can gather and document both machine data and georeferenced data via Task Controller (TC).

Part-area, site-specific operation via application maps in either Shape file or ISO-XML format is also possible.

### Advantages of GPS-Maps&Doc with the AmaTron Share App:


- ✔ Intuitive system for processing application maps
- ✔ Automatic part-area, site specific regulation of the application rate
- ✔ Indication of inactive field boundaries and automatic field detection when approaching the vicinity
- ✔ Optimum crop management via needs-based application
- ✔ Comfortable import of jobs in ISO-XML or Shape file format and export of completed jobs in ISO-XML format or as a job summary in PDF format via the AmaTron Share App
- ✔ Start a new task straight away and decide later whether the data is to be saved or not

## AmaTron Share App – for comfortable data management!

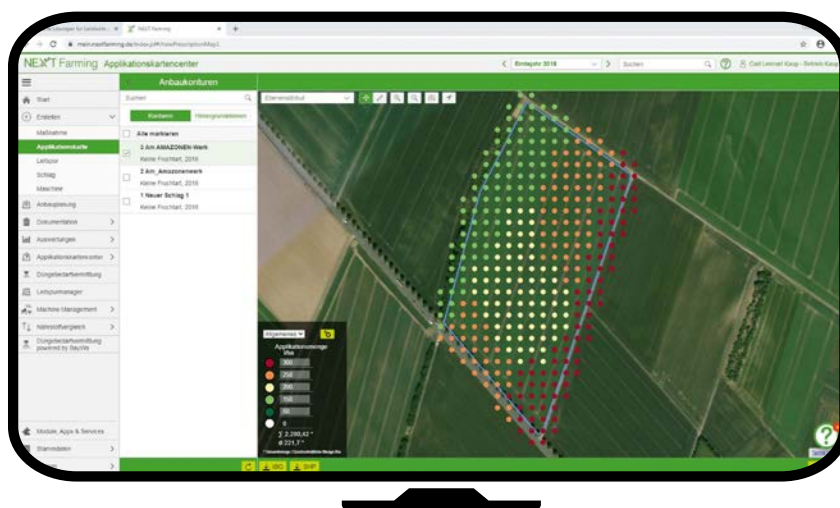

ISO-XML and  
shape

ISO-XML and  
PDF

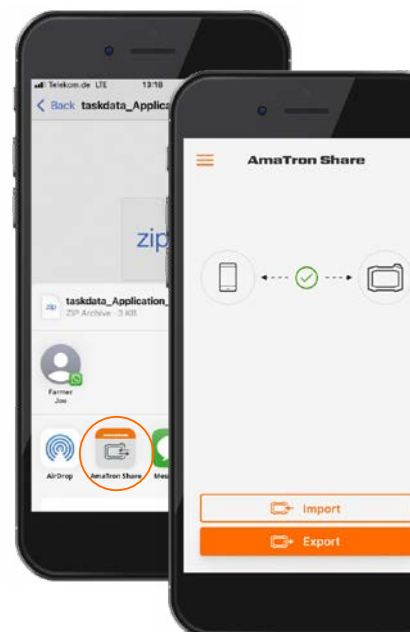

Generation of an application map in a farm management information system for automatic part-area, site-specific control of the application rate via the AmaTron 4





Display of the application map in AmaTron 4



Display of the camera image in the AmaTron 4

## GPS-Track

The GPS-Track parallel guidance greatly helps with orientation in the field, especially on grassland or in areas without tramlines.

- ✓ With a virtual light bar in the status bar
- ✓ Automatic tramline control via GPS for seed drills
- ✓ Various track modes such as A-B lines or contour following
- ✓ Optional with AmaTron 4

## AmaCam

Software licence for displaying a camera image on AmaTron 4.

- ✓ Automatic display of the camera image on AmaTron 4 when reversing

## AmaTron Share App for digital data transfer. Try it now!

The AmaTron Share App, which is connected to the AmaTron 4 via a Wi-Fi hotspot, allows all data to be conveniently transferred online. For example, the App enables application maps to be easily sent from the office to the AmaTron 4 for completion. Job data can also be sent to customers or back to the office as PDF documentation via the cloud, email or messenger services such as WhatsApp after the job has been completed. This is user-friendly data management!




The AmaTron Share App



# Automatic part-width section control GPS-Switch

Example: 24 m working width (6-6-8-8-8-6-6 = 48 nozzles)

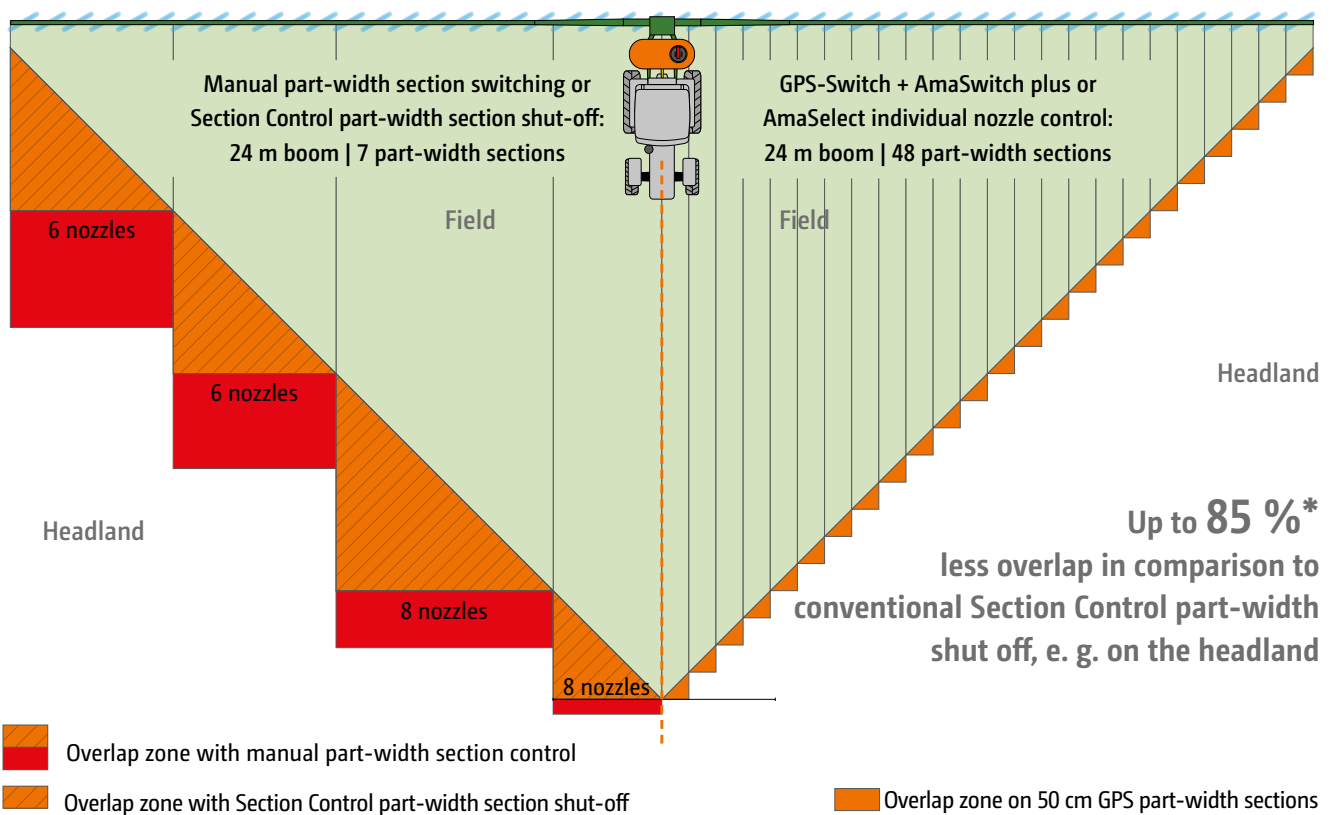

Automatic part-width shut-off on the headland and in wedge-shaped fields **GPS-Switch**

**5 %\***

Saving on crop protection agent usage



Electric individual nozzle control  
**AmaSwitch plus or AmaSelect**

**5 %\***

Additional saving in crop protection agent usage

\* Savings are dependent on field shape, boom width and the number of part-width sections

## Precise switching with 50 cm part-width sections

The decisive benefit of individual nozzle control is the possibility to operate with small part-width sections giving an even greater degree of accuracy in wedge shaped fields, short work and on the headland. If AmaSwitch plus or AmaSelect is combined with the automatic section control, GPS-Switch, automatic switching of individual nozzles in 50 cm part-width sections is made possible. With this system, areas of overlap are significantly reduced and are, in

comparison with a conventional Section Control part-width section shut-off system, up to 85 % less. So, the combination of GPS-Switch and individual nozzle control results in, depending on field shape and size, the working width and number of part-width sections, significant savings in spray agent compared with a normal spraying system used thus far.



Overlaps on the headland or in wedge shaped fields are prevented via precise switch points with GPS-Switch.



## GPS-Switch

If the operating terminal facilitates Section Control, such as GPS-Switch part-width section control from AMAZONE, the part-width sections are activated completely automatically and in relation to the GPS position. Once a field has been created, and then in automatic mode, the driver can concentrate fully on the operation of the towing vehicle, since the part-width sections are switched automatically in wedge shaped fields and on headlands.

### Benefits of automatic part-width section control:

- ✓ Stress relief for the driver
- ✓ Increased precision, even at night or at higher speeds
- ✓ Fewer overlaps and gaps
- ✓ Saving inputs
- ✓ Less crop damage and environmental impact

- ❗ "With Section Control, the ISOBUS terminal takes on so much of the work from the driver."  
 ("dlz agrar magazine" – test report ZA-TS fertiliser spreader · 02/2017)

With GPS-Switch, AMAZONE offers GPS-based, fully automatic, part-width section control for all AMAZONE operator terminals and ISOBUS-compatible fertiliser spreaders, crop protection sprayers or seed drills.

### GPS-Switch basic

- ✓ Automatic part-width section control with up to 16 part-width sections
- ✓ Creation of a virtual headland
- ✓ Automated boom lowering on AMAZONE crop protection sprayers

### GPS-Switch pro (in addition to GPS-Switch basic)

- ✓ Auto-zoom when approaching the headland and obstacle marking

### ✓ AmaClick

Specialist crops and bed work often require the switching on/off of the individual part-width sections in the middle of the boom. AmaClick is an additional ergonomic control unit that can be used either in conjunction with the AmaPilot<sup>+</sup> multi-function joystick or also as a standalone system alongside an ISOBUS terminal.



# AMAZONE aircraft-style boom design



✓ Lift mast with height adjustment of approx. 0.50 to 2.20 m

❗ “On the Amazone, the boom provides the biggest range of adjustment and quickest folding.”  
(profi magazine – Practical test: “5 mounted sprayers in comparison” - 01/2013)

❗ “The Amazone UF 1201 with its Super-S boom features the best suspension and damping.”  
(profi magazine – Practical test: “5 mounted sprayers in comparison” - 01/2013)





## Simultaneously superbly strong and superbly light

Due to the special profile design, AMAZONE sprayer booms are very light yet, at the same time, very robust. The nozzle bodies with integrated diaphragm non-return anti-drip valves fit up into the boom profiles reliably preventing any dripping at the nozzle. Self-adjusting bayonet fixings ensure a tool-less quick nozzle change. The right nozzles are available for any operational use and application, e.g. optimum wetting, anti-drift or liquid fertiliser use.

## 3-fold shock absorbed suspension for the most arduous of operational conditions

As standard, all AMAZONE booms are equipped with

- ✔ springs and shock absorber pack for damping the vertical roll movement
- ✔ rubber buffer damping elements with ball suspension to damp down the horizontal yaw movements and
- ✔ tension springs for the shock absorbed suspension of the entire boom.

The hydraulic height adjustment and guide skids also come as standard and ensure precise longitudinal and lateral distribution of the spray agent.

## Boom designed to perfection

In hilly terrain and with large working widths, hydraulic tilt adjustment makes sense. The quick and precise tilting and return of the boom into the level position is possible via a tractor spool valve or via the electro-hydraulic functions in the ISOBUS terminal.

The AMAZONE Q-Plus and Super-S booms have been approved by the JKI. They therefore comply with the highest European demands for plant protection equipment – compare that with others!



# Compare for yourself!

It's those important quality features that make the difference!

## AMAZONE booms – an idea becomes reality

### Compactness matters!

It is easy to carry due to the low centre of gravity and the light and robust design of the machine. The front axle weight load is lower than that of many competitors.

### Drive safely!

The visibility in road transport is exemplary. Anywhere the tractor can go, the sprayer, with its narrow boom fold, goes as well. No protruding parts, no boom damage, minimal transport width.


### Everything in its place!

The boom locates safely in the transport hooks. No rattling. No susceptible wear on the boom pivots. High road speeds are not a problem.

## Maintenance-free and with a long service life


The decades of experience in boom design pay off: the conical hinge pin is the intelligent centre of a well thought-out boom philosophy! The boom pivot points self-adjust against any play on the conical hinge pins, thus ensuring an optimal boom function for the operator, even after many years.

The standard use of stainless steel, the use of automotive-industry standard, cathodic dip painting process and the targeted use of plastics and aluminium are the perfect guarantee of a long service life.

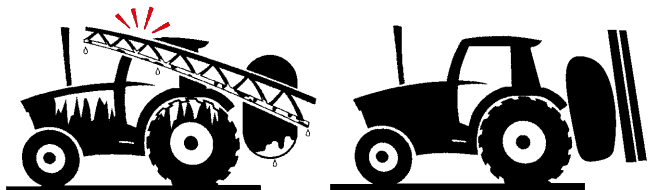

### Clean working!

No spray agent from the booms drips on to the tractor or the operator station and the booms also do not hit the tractor cab.

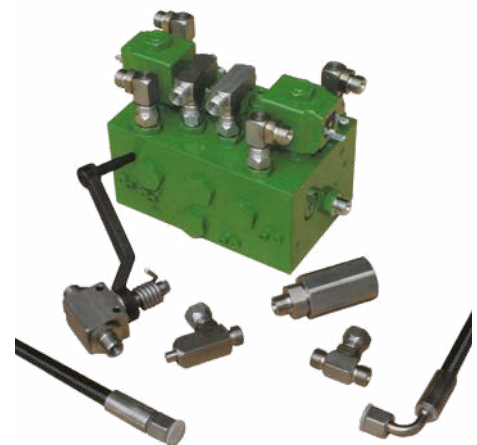

🔧 A pivot joint that lasts!

Exclusively from AMAZONE: All hydraulic connectors are always made from stainless steel!



# Q-plus boom

12 – 12.5 – 15 metres

UF 901  
with 15 m Q-Plus boom



## The robust, entry-level boom

With the horizontally folded Q-Plus boom in working widths of 12 m, 12.5 m and 15 m, AMAZONE offers an entry-level boom that is second to none when it comes to quality and reliability. Folding in and out is hydraulic as standard, as are the boom height adjustment and one-sided folding in the left-hand direction of travel.

### The benefits:




- ✔ Super-stable and, at the same time, super-light
- ✔ 3-fold shock absorption
- ✔ Hydraulic height adjustment as standard
- ✔ One-sided folding on the left-hand side as standard
- ✔ Available with hydraulic tilt adjustment

### ✔ Centralised hose guidance

The central hose guidance ensures a clean and kink free routing of all hoses and cables.

## Boom layout and folding variants for the Q-Plus boom

Working widths




# Super-S boom

The industry-leading boom from 15 to 24 metres



## Super-S1 and S2 boom suspension

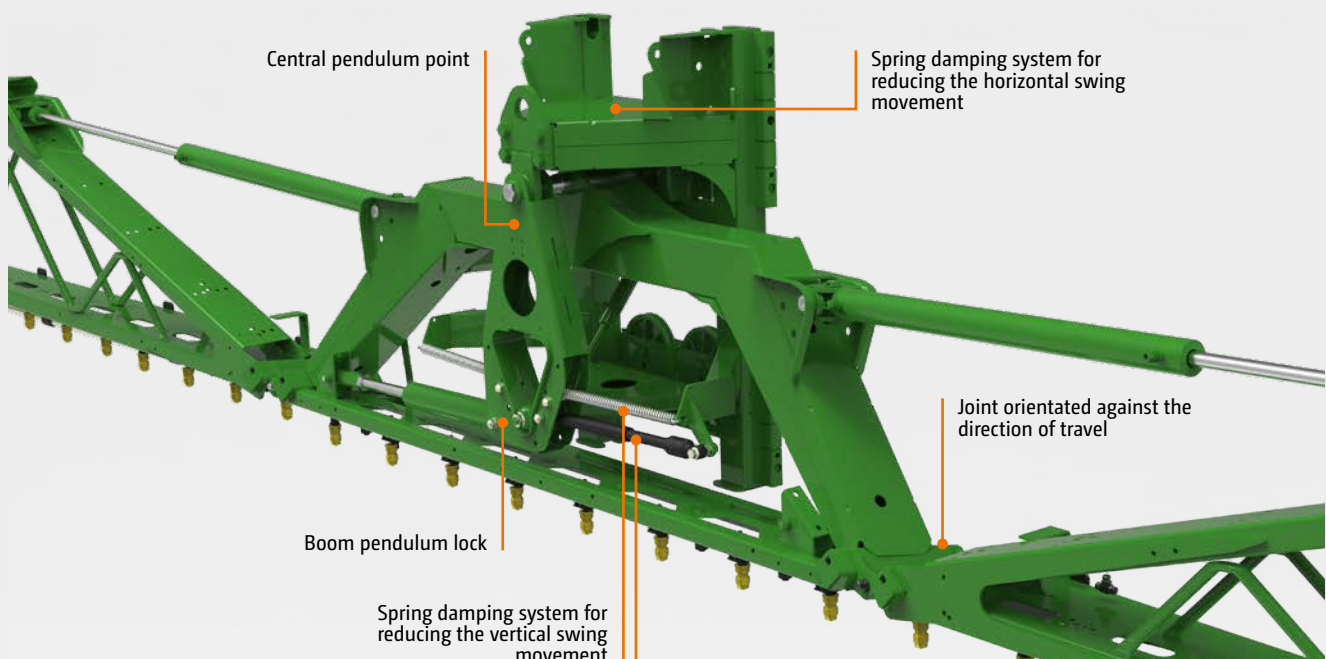

- ✓ The 3-fold, shock-absorbed suspension, with hydraulic height adjustment and elastic boom height indicators, guides the boom reliably over the crop at the right height.



## The comfortable, high-end boom in working widths of up to 24 m

The vertically folding Super-S boom is available in working widths from 15 m to 24 m. Due to the layout of the boom, there are only a few pivot points, which enables a quick folding and, more importantly, a transport width of just 2.40 metres. When equipped with Profi-fold electro-hydraulic boom actuation and DistanceControl height control, operation is made so much easier.

The Super-S boom is available in the Super-S1 boom from 15 m to 21 m and the Super-S2 boom from 15 m up to 24 m.

## More than just a solid core: Profiles made from high tensile steel

What has been taken away from the boom in weight has been returned in output. The clever lightweight design makes use of the material where it makes sense. For instance, aluminium is used for weight reduction in the outer boom sections of the Super-S2 boom but not in the inner boom sections. There, high tensile steel is necessary so that the boom is kept rigid and in line and so any spray errors due to movement are prevented.



### The benefits:

- ✔ Super-stable yet super-light
- ✔ Super-narrow transport width of just 2.40 m
- ✔ 3-fold shock absorption
- ✔ Hydraulic height adjustment as standard
- ✔ Expandable with hydraulic tilt adjustment
- ✔ Expandable with boundary nozzle switching
- ✔ Expandable with Profi-fold electro-hydraulic boom actuation



- ✔ The Super-S2 boom is super-robust and, at the same time, super-light

# Super-S1 boom


15 – 18 – 21 metres



Due to the layout of the boom sections, there are only a few pivot points, which allows faster folding. The well-known robust profile construction of this execution also convinces. Despite the individual sections of the Super-S1 boom being 50 centimetres longer in comparison with

the Super-S2 boom, the machine height comes to just 3.30 metres. The Super-S1 boom, which has working widths of 18 and 21 metres, can be easily reduced to 15 metres by folding in the outer boom sections.

## Boom layout and folding variants for the Super-S1 boom

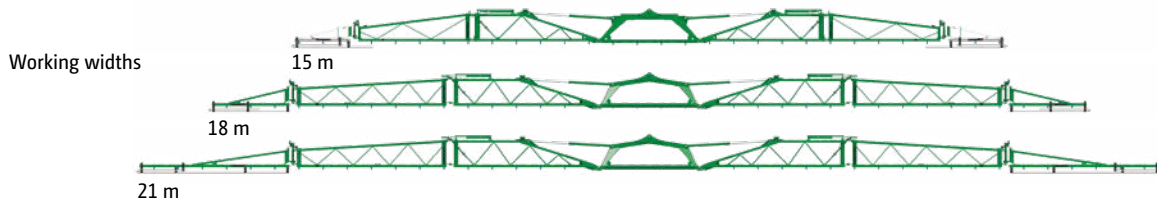


# Super-S2 boom

15 – 16 – 18 – 20 – 21 – 24 metres

Due to the shorter, individual sections, a machine height of just 2.90 m is achieved.

## Boom layout and folding variants of the Super-S2 boom

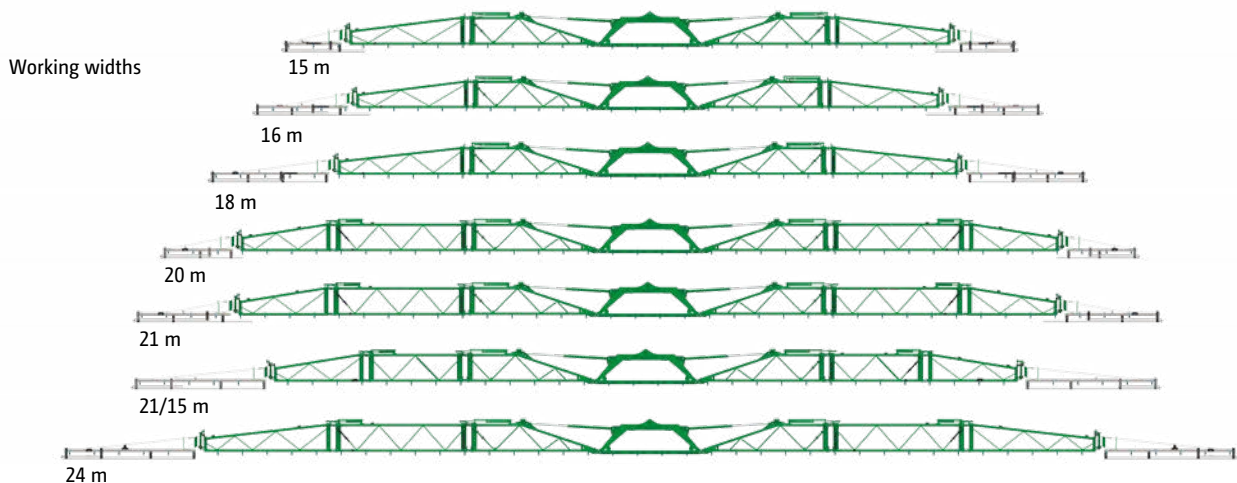




# With maximum comfort and even more precision

## Pre-select fold:

Independent folding is possible via the AmaSpray<sup>+</sup> in-cab terminal or an ISOBUS terminal via spool valves.

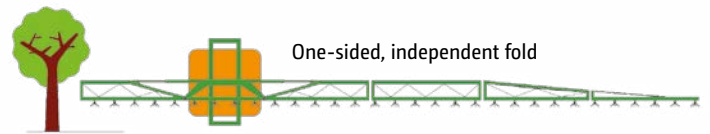


## Profi-fold – flexible and comfortable

As an option for all Super-S booms, AMAZONE offers the Profi-fold electro-hydraulic actuation system. All hydraulic functions can be performed reliably and easily from the cab via ProfiClick. The multi-function joystick makes handling particularly comfortable.

### Profi-fold 1:

Height adjustment, folding in/out, one-sided independent fold at reduced speeds (max. 6 km/h), boom width reduction, tilt adjustment.

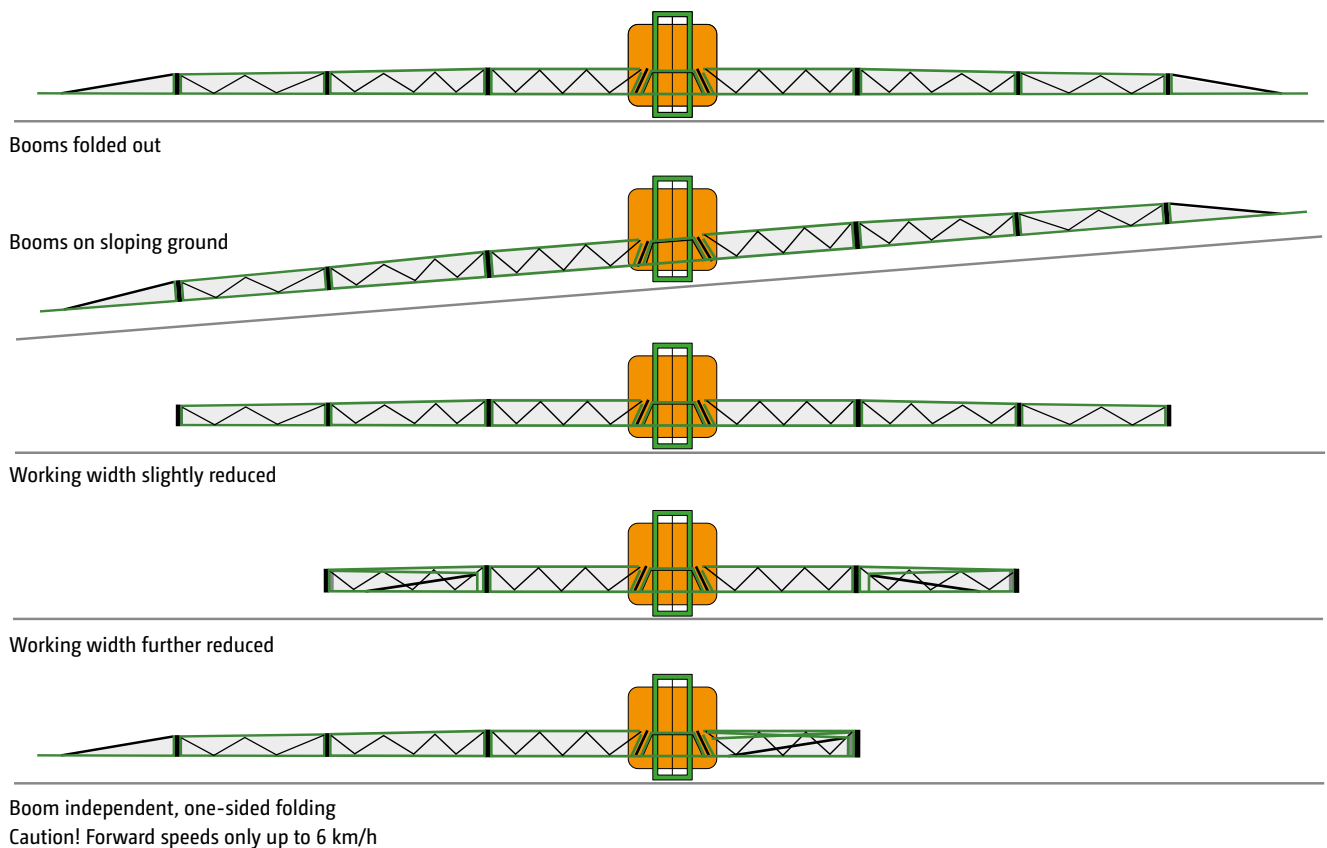

# DUS pressure recirculation system





# With DUS you set the pace




DUS pressure recirculation system

## The DUS pressure recirculation system – proven more than 10,000 times


The AMAZONE DUS pressure recirculation system ensures a reliable circulation throughout the entire system. When starting the spraying operation, all the hoses including the spray lines are filled under pressure in the reverse direction with the mixed spray agent. This means the spray lines are always full and immediately ready to use across the entire working width. There is no waiting on the headland.

Every time individual part-width sections are shut off, during the turning operation and during transport, the spray liquid circulates continually thanks to the pressure recirculation system. This reliably prevents deposits, blockages or segregation in the spray lines.

During the cleaning operation, fresh water flushes out the lines up to the nozzles without spraying being necessary. During this cleaning procedure, the concentrated spray agent is returned to tank via the pressure recirculation system leaving the spray lines clean.

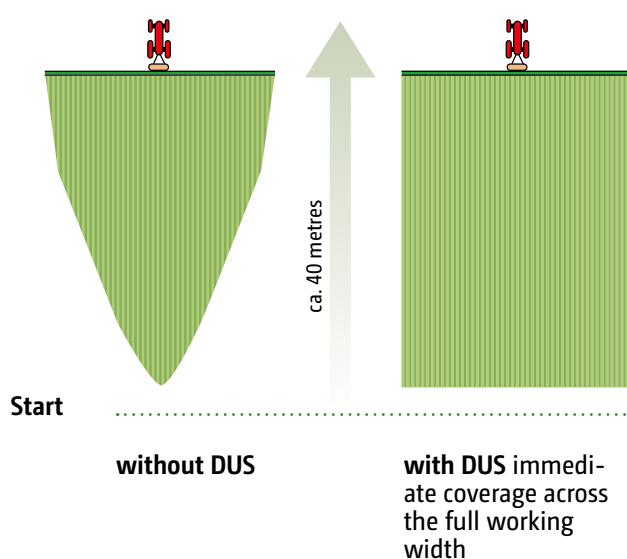

## DUS pressure recirculation system: feeds each individual part-width section

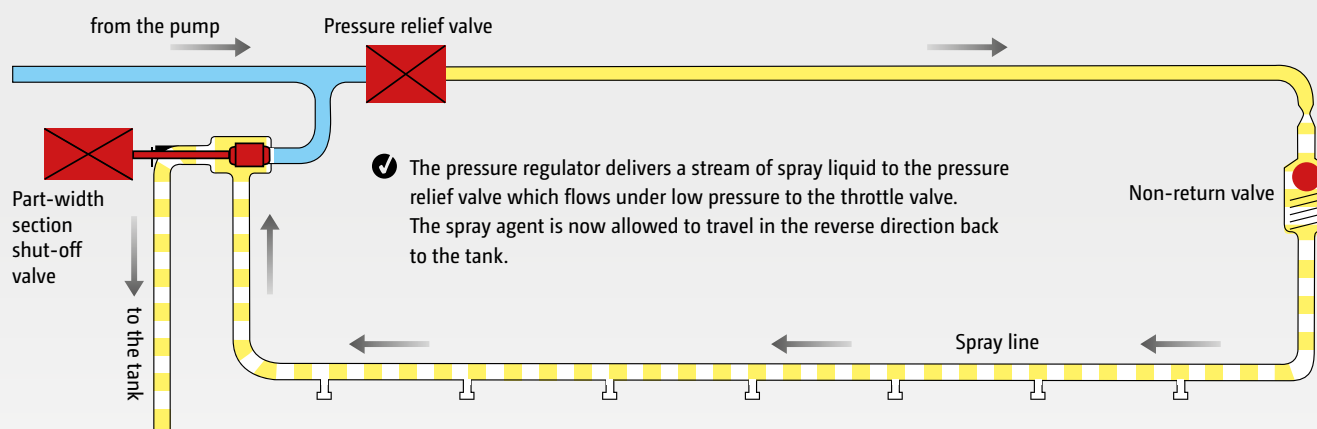

# The right nozzle choice

The basis for success in crop protection



## Less drift also at higher wind speeds

With the air-assisted injector nozzles, crop protection agents can be applied with very little drift. They are universally usable in all crops and all classifications. Because of the coarse droplet application, these nozzles can also be used in higher wind speeds.

AMAZONE offers a wide range of nozzles from agrotop, Lechler and TeeJet.

## Single and multi-nozzle bodies

The nozzle bodies with integrated diaphragm non-return anti-drip valves fit up into the boom profiles reliably preventing any dripping at the nozzle. Self-adjusting bayonet fixings ensure a tool-less quick nozzle change. The triple or quad nozzle bodies are suitable for frequent nozzle changes due to different applications and crops. Nozzle protection tubes, as standard on the outer sections, or, if desired, over the entire boom working width, ensures protection for long injector nozzles and multiple nozzle bodies.







#### Examples

- 1) Lechler IDN 120-025
- 2) TeeJet XRC 110-025
- 3) Injector flat fan nozzle  
AirMix 110-04



- ✓ Everyone purchasing an AMAZONE crop protection sprayer receives, free of charge, an AMAZONE nozzle fitting tool that makes for a much easier nozzle change.

Injector nozzles (ID, TTI) have a relatively coarse droplet spectrum and are particularly versatile with regard to their field of application. A pressure range of 2 to 8 bar is possible.

If coverage quality is at the foreground of the application, the use of standard or anti-drift fine droplet nozzles, such as XR or AD, is recommended. Special care is required here due to their tendency to drift above 3 bar.


A good compromise is provided by the modern ID-K or Airmix compact injector nozzles. These have relatively little drift, but do not have too coarse a droplet spectrum and are operated at 2 to 4 bar.

When it comes to special coverage qualities, the double flat fan nozzle is an interesting alternative: the AVI Twin from Agrotop also produces droplets that are not too fine.

The split spray pattern ensures a more even deposit on the front and back of the plant and is an interesting alternative in many applications.


For speeds of more than 10 km/h, the TD HiSpeed nozzle with its asymmetrical spraying angle is becoming a new industry trend.

#### Distribution of the droplet size

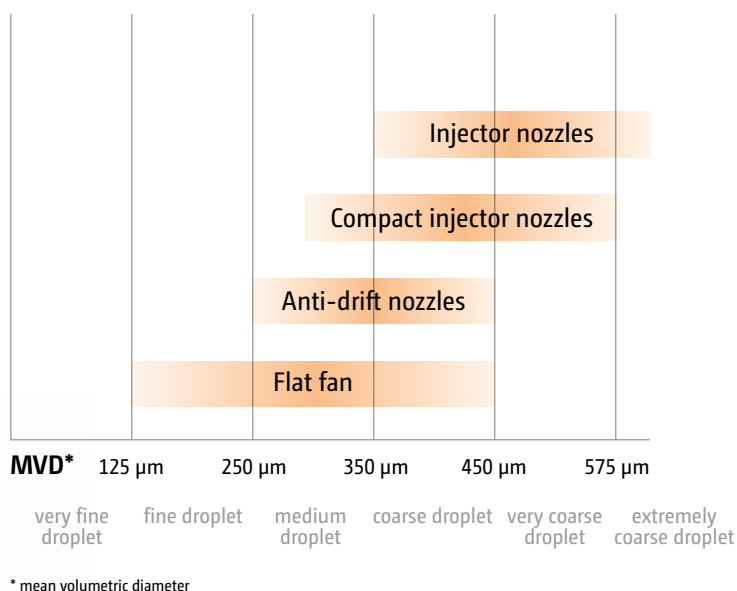


# Electric boundary nozzle control on the Super-S boom

For environmentally-friendly spray application at the field edge

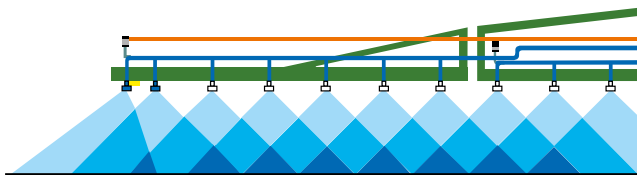


## Additional nozzle switching

In order to extend the normal working width, an asymmetrical nozzle can also be switched on. This is particularly useful if the distances between tramlines are not precise enough.

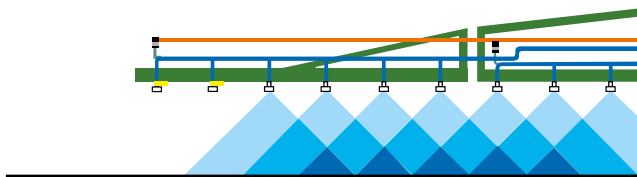

## End nozzle switching

If a one metre buffer zone around the edge of the field needs to remain unsprayed due to distance constraints, end nozzle switching can be used.

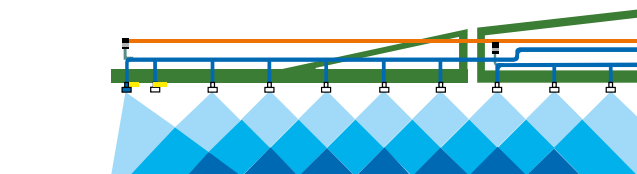

## Boundary nozzle switching

For precision border spraying between two sensitive crops, the boundary nozzles can be used to make sure the spray pattern is accurately defined.







Stainless steel weights on the drag hose

## Under-leaf spraying

Elegant solutions for successful under-leaf spraying are also possible in combination with AMAZONE crop protection sprayers. The Dropleg system from Lechler, for instance, is an easy and robust under-leaf spraying system that hangs freely between the rows and which fully meets the demands of the professional grower.

## Operator-friendly liquid fertilising

In conjunction with the AMAZONE boom, a separate drag hose kit for risk-free late fertilising is available. The self-contained aluminium profiles can be attached with a few hand clamps. Stainless steel weights help keep the position of the drag hoses in the crop. AMAZONE offers 3-hole, 5-hole or 7-hole nozzles for the coarse droplet distribution of liquid fertiliser.

❗ “The nozzles are easy to access and only Amazone provides any relevant drag hose equipment.”

(profi magazine – Practical test: “5 mounted sprayers in comparison” - 01/2013)

## LED boom lighting for Super-S booms

For flexible and efficient operation at twilight and in the dark, LED boom lighting is available.

Two far-reaching LED work lights, mounted in the middle of the boom, ensure excellent visibility of all the nozzles at a glance.



# The small self-propelled sprayer

## UF 01 with front tank



The FT 1001 front tank enables the tank capacity of the UF 01 mounted sprayer to be very easily extended by 1,000 l. Thanks to its compact design, the front tank is the ideal solution for increasing the overall capacity of the UF 01.

### The benefits:

- ⊕ Improved driving stability on slopes due to the additional loading of the front axle
- ⊕ Extremely compact design thanks to front linkage – better manoeuvrability in the field and for safer road transport

The special advantages offered of more manoeuvrable tractors with a mounted implement compared with trailed sprayers in smaller and more awkward shaped fields as well as the better behaviour on slopes are the major arguments for the front tank solution.





## Sophisticated design for the utmost in safety

In the yard or in the barn: the compact combination, carried on its transport wheels, stores easily away. The system's simple handling is already convincing even after just a few hours in the field. The internal cleaning of the sprayer combination is carried out via the fresh water tank on the UF 01. The additional water tank with a capacity of 100 l enables appropriate cleaning according to the European guidelines (fresh water capacity at least 10 % of the tank capacity).

The compact sprayer-tractor unit is favourable especially in narrow lanes with hardly any obstruction to the view thanks to the well thought out design.

The AMAZONE FT 1001 complies with all relevant EU traffic safety directives and standards.

The optional road lighting kit is necessary in cases where the lights of the tractor are hidden. The hidden headlights of the tractor must be duplicated on the tractor roof. The fitting on the front tank is not allowed.



### Optional camera system

In difficult driving situations, such as when pulling out of road junctions, the optional camera system on the front tank and on the mounted sprayer provides better visibility, and thus more safety, to the front and the rear. The high resolution, antiglare monitor is backlit and can also display two camera images at once.

# The original is simply better

AMAZONE service and quality



Experience that pays off. That's why AMAZONE guarantees you the highest quality thanks to a very high level of vertical integration within its own factories in Europe - and it has been doing so for more than 140 years. The original is simply better.

In most cases, things need to happen very quickly, especially when there is limited time for the optimum application of plant protection agents. That is why AMAZONE offers a first-class parts service with genuine parts that are precisely matched to your machine. So your machine is always ready for use - quality parts and available worldwide.

The Global Parts Center in Tecklenburg-Leeden in Germany is the base for our worldwide parts logistics system. This ensures the optimum availability of parts, even for older machines. Whenever you need us, the AMAZONE service team is there for you, supported by a network of competent and highly trained sales partners and service technicians.

AMAZONE also offers an intensive introduction to the operation and handling of your new machine on your farm by a trained member of the AMAZONE team. Alternatively, you can use "SmartLearning" - AMAZONE's interactive driver training - to familiarise yourself with the machine's operation before using it for the first time.

Effective plant protection from the very first metre.

## The advantages of genuine parts and wearing metal:

- ✔ Quality, reliability and performance
- ✔ Immediate availability, even for older machines
- ✔ Higher resale value of your used machine





# myAMAZONE

for more performance



Register now

[www.amazone.net/myamazone](http://www.amazone.net/myamazone)



WARRANTY

## » Register now and apply for a 24 month manufacturer guarantee!

- ✔ Extend the protection offered for your machine with a 24 month manufacturer guarantee.
- » The extended guarantee can be applied for within the contractual warranty period of 12 months after initial installation.

NEW



PARTS

## » Parts – find the right parts for your machine even more easily now!

- ✔ The right parts list for your machine with just one click.
- ✔ Identify the correct part in the exploded views in no time at all.
- ✔ Create a shopping basket and send it to your service partner.



ADJUSTMENT AND OPERATION

## » Now enter the machine number and see at a glance all the relevant information to help get the maximum performance from your machine

- ✔ Season start and commissioning
- ✔ Adjustment and operation
- ✔ Parts lists and operating instructions
- ✔ Maintenance and storage



## Technical data: UF 01 mounted sprayer

Model	UF 901 12 m Q-plus 160 l/min TG 5 section AmaSpray <sup>+</sup>	UF 901 15 m Q-plus 160 l/min TG 5 section AmaSpray <sup>+</sup>	UF 1201 15 m Super-S1 160 l/min TG 5 section AmaSpray <sup>+</sup>	UF 1201 21/15 m Super-S1 210 l/min TG 7 section AmaTron 4
Actual volume (l)	1,050	1,050	1,350	1,350
Empty weight (kg)	680	713	893	1,012
Length (m) *	1.65	1.65	1.70	1.70
Height (m)	2.66	2.66	3.30	3.30
Transport width (m)	2.56	3.00	2.40	2.40
Height adjustment (m)	0.50 – 2.10	0.50 – 2.10	0.50 – 2.10	0.50 – 2.20

\* Dimensions of the lower link mounting



Model	FT 1001
Basic weight (kg)	217
Nominal volume (l)	1,000
Actual volume (l)	1,125
Permissible total weight (kg)	1,475

Illustrations, content and technical data are not binding! Deviations of technical data are possible depending on the equipment. The illustrations may deviate from the requirements for local road traffic regulations.



**AMAZONEN-WERKE H. DREYER SE & Co. KG**  
P. O. Box 51 · 49202 Hasbergen-Gaste/Germany  
Phone +49 (0)5405 501-0 · Fax +49 (0)5405 501-193